

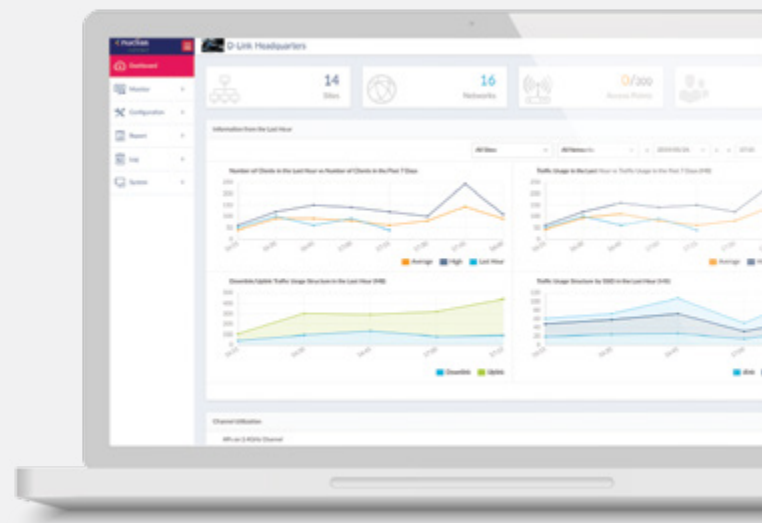
# NUCLIAS CONNECT AC1200 WAVE 2 ACCESS POINT

DAP-2662



## Nuclias Connect Overview

Welcome to Nuclias Connect, D-Link's centralized management solution for Small-to-Medium-Sized Business (SMB) networks. Nuclias Connect makes it easier to analyze, automate, configure, optimize, scale, and secure your network – delivering the convenience of an Enterprise-wide management solution, at an SMB price.



▲ Intuitive Dashboard Interface

## Solution Features

- » Nuclias Connect Management Software
- » License-Free Access Points
- » Backwards-Compatibility
- » Intuitive Interface
- » Inexpensive Hardware Controller\*
- » Traffic Reporting and Analytics
- » Remote Configuration and Batch Configuration
- » Multi-Tenant and Role-Based Administration
- » Searchable and Auditable Event and Change Logs
- » 802.1x<sup>1</sup> and RADIUS Server, POP3, LDAP
- » Multilingual Support
- » Front-Desk Ticket Management
- » Authentication and Payment Gateway (Paypal) Integration via Customizable Captive Portal

## Solution Benefits

### 1 / Network-Wide Management

Nuclias Connect Software is designed for installations on Windows server or Linux OS (via Docker installation) and currently supports a dozen new and legacy D-Link Access Point (AP) models. It is also capable of managing up to one thousand APs. Coupled with a local lite management smartphone app and an inexpensive optional hardware controller (The Hub\*), Nuclias Connect is even suitable for remote locations where a dedicated PC or server might be impractical.

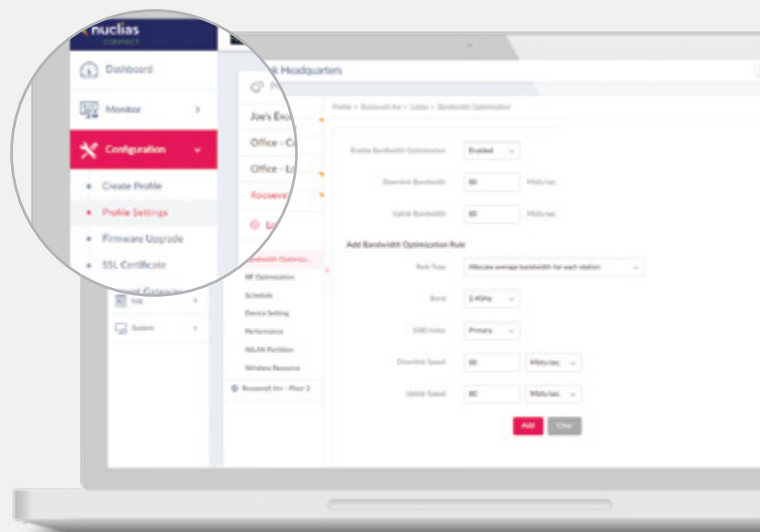
*\*Please contact your local D-Link office for availability*

### Deployment Scenarios



## 2 / Flexibility to Meet Your Needs


Through software-based monitoring and remote management of all wireless Access Points (APs) on your network, Nuclias Connect offers tremendous flexibility compared to traditional hardware-based management systems. Configuration can be done remotely and management software is customizable. Nuclias Connect enables control and analytics of a broad or fine granularity, presentable in a variety of formats. Additionally, admins can provide and manage a variety of distributed deployments, including the option to configure settings and customize admin accounts for each deployment. Nuclias Connect gives you the financial and technical flexibility to expand from a small network to a larger one (up to 1,000 APs), while retaining a robust and centralized management system.



▲ Network-Wide Configuration

## 3 / Easy Administration

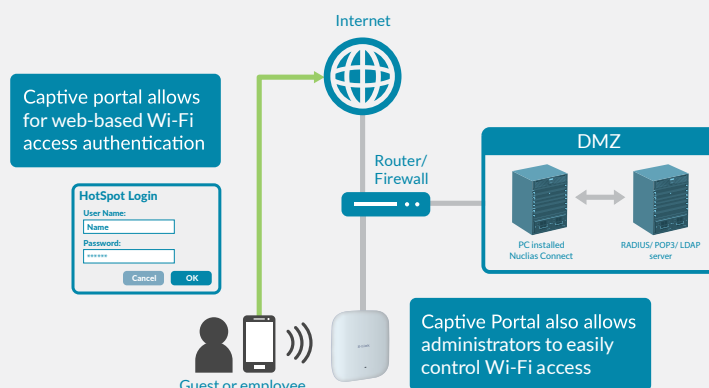
Nuclias Connect supports multi-tenancy, so network admins can grant localized management authority for local networks. In addition, because APs can support eight SSIDs per radio and VLAN, administrators have the option of using one SSID to create a guest network for visitors. Nuclias Connect allows for multiple user authentications and also makes it possible to configure specific access controls for each SSID, giving admins the option of configuring separate internal networks for different subnets. This means that more advanced Value-Added Services, such as Captive Portal or Wi-Fi Hotspot, can be used to help manage wireless network traffic.



▲ Captive Portal with Customizable Login Page

## 4 / Insights at a Glance

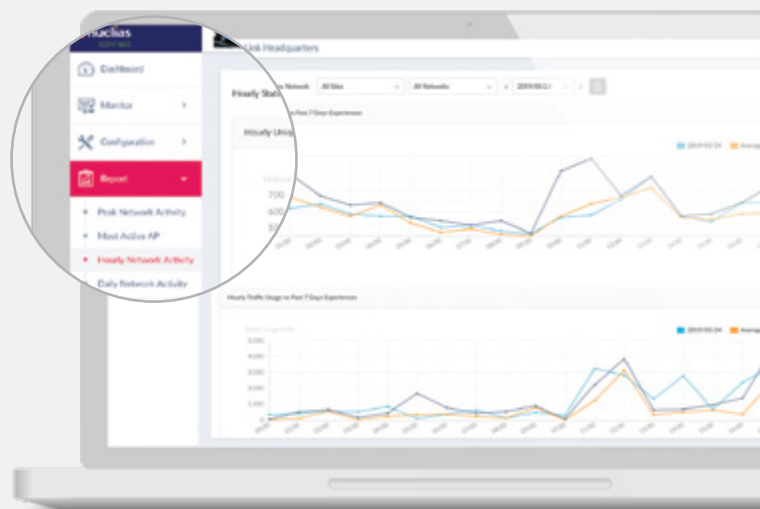Gain an extensive understanding of your network through usage analytics and status reports which can be viewed easily at a glance. Insights derived from traffic data can create business value. Traffic can be viewed across the entire network or at the level of a single AP.



▲ Statistics - Hourly Network Activity

## 5 / Network Security and Data Privacy

Nuclias Connect balances the need for access convenience with the need for security. All communications over the system are encrypted (192<sup>1</sup>/128-bit wireless encryption), with your user data never leaving your possession. Additional security measures (such as firewalls) can also be added to your network, with no unneeded technical difficulty.

## Product Introduction

The DAP-2662 Nuclias Connect AC1200 Wave 2 Access Point is designed to support small-to-medium businesses or enterprise environments by providing network administrators with secure and manageable dual-band wireless LAN options, and utilizing the cutting-edge speed of Wireless AC.

## Wireless Performance

- » New-generation IEEE 802.11ac wireless
- » High-speed 1200 Mbps throughput
- » Dedicated Gigabit LAN port for a wired connection
- » Powerful Wi-Fi Multimedia™ Quality of Service (QoS)
- » Load balancing to optimize performance between Access Points

## Trusted Security

- » WPA™ Personal/Enterprise
- » WPA2™ Personal/Enterprise
- » 64/128 bit WEP
- » MAC-based access filtering and WLAN partitioning
- » Captive Portal with industry-standard authentication
- » VLAN support for network segmentation

## Extensive Management

- » Powerful management, monitoring, and troubleshooting functionality with Nuclias Connect
- » Flexible access through web (HTTP), SSL, SSH, and Telnet
- » Multiple operation modes including Access Point, Wireless Distribution System (WDS), WDS with Access Point, and Wireless Client
- » Wireless scheduling to manage access point activity

## Versatile Installation

- » Powered by IEEE 802.3af Power over Ethernet for remote installation
- » Multiple installation options including desktop, wall and ceiling mounting


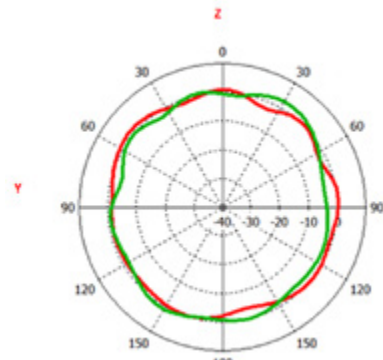
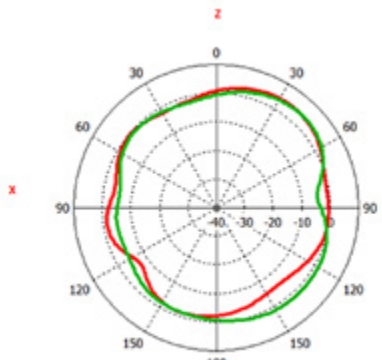

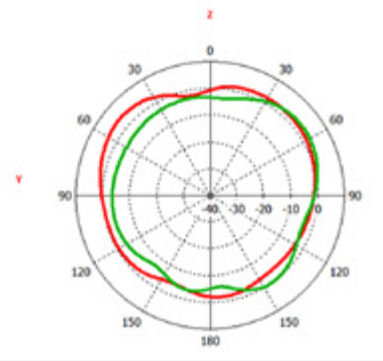
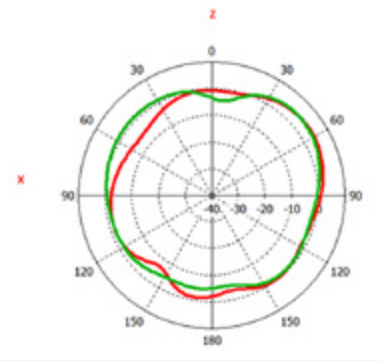

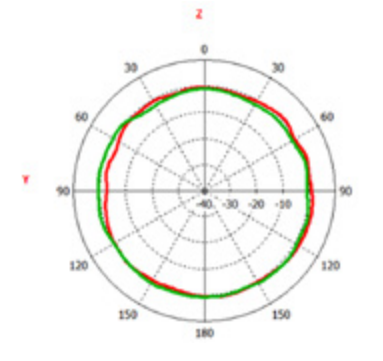
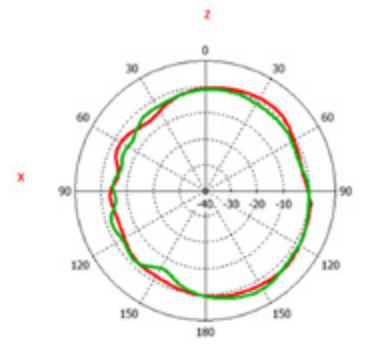

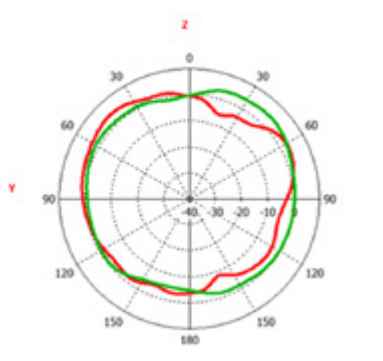
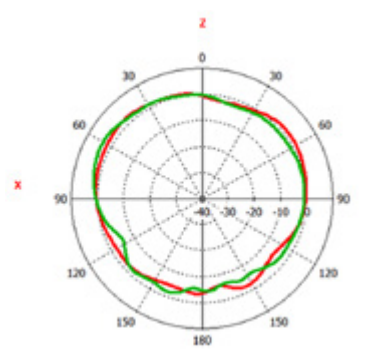
## D-Link Nuclias Connect

- Functionality
- » Support Hierarchical management
    - » The managed APs uses HTTPS to connect to the manager
    - » L2/L3 networker topology management
    - » With graphical usage chart, and can view historical traffic information up to seven days
  - » Support LDAP/POP3/Passcode/RADIUS
  - » Captive portal authentication and web redirect
  - » Basic on SSID to set bandwidth
  - » Support remote firmware upgrade
  - » APs can be grouped to schedule firmware updates and apply configuration files
  - » Support scheduling function, it can automatically perform maintenance and setting adjustments according to the specified time
  - » Support automatic wireless optimization function, automatically adjust the output power and wireless channels according to the environment
  - » Support 5GHz priority function, automatically adjust 5GHz and 2.4GHz connections according to the connection status
  - » MAC-based access filtering
  - » Support centralized management up to 1000 APs
  - » Support APP management

# Technical Specifications

General		
Device Interfaces	IEEE 802.11a/b/g/n/ac wireless <sup>2</sup>	1 x Gigabit LAN (PoE supported)
Standards	IEEE 802.11a/b/g/n/ac <sup>2</sup> IEEE 802.3u/ab	IEEE 802.3az Energy-Efficient Ethernet (EEE) IEEE 802.3af Power over Ethernet
Antennas	2 x internal dual-band antennas <ul style="list-style-type: none"> <li>• 2 x 3.8 dBi at 2.4 GHz</li> <li>• 2 x 3.8 dBi at 5 GHz</li> </ul>	
Operating Frequency <sup>3</sup>	2.4 GHz band: 2.4 to 2.4835 GHz	5 GHz band: 5.15 to 5.35 GHz, 5.47 to 5.85 GHz
Maximum Output Power	2.4 GHz band: 26 dBm	5 GHz band: 26 dBm
Data Signal Rate	2.4 GHz band: Up to 300 Mbps <sup>2</sup>	5 GHz band: Up to 866 Mbps <sup>2</sup>
Functionality		
Security Features	WPA™ Personal/Enterprise WPA2™ Personal/Enterprise WEP 64/128-bit encryption	SSID broadcast disable MAC address access control Internal RADIUS server Rogue AP detection
Network Management	Telnet Secure Telnet (SSH) Web (HTTP) IPv4/IPv6	Secure Socket Layer (SSL) Traffic control D-Link Nuclias Connect D-Link Central Manager ( support Multi-Language include traditional Chinese)
LEDs	Power/Status	
Other Features	Fast Roaming Support with 802.11k, 802.11v, and 802.11r	Passpoint Hotspot 2.0 Support
Physical		
Dimensions	170 x 170 x 28 mm (6.69 x 6.69 x 1.1 in)	
Weight	350 g (12.34 lbs) without mounting bracket	400.6 g (14.13 oz) with mounting bracket
Power Supply	External power adapter: 12 V/2.5 A	IEEE 802.3af PoE
Maximum Power Consumption	6.5 W	
MTBF	341,897 hours	
Temperature	Operating: 0 to 40 °C (32 to 104 °F)	Storage: -20 to 65 °C (-4 to 149 °F)
Humidity	Operating: 10% to 90% non-condensing	Storage: 5% to 95% non-condensing
Certifications	FCC IC CE <sup>5</sup>	LVD Wi-Fi® Certified NCC BSMI

# Antenna Pattern

Orientation	H-Plane	E-Plane
<b>2.4 GHz Ceiling Mounted</b> 		
<b>2.4 GHz Wall Mounted</b> 		
<b>5 GHz Ceiling Mounted</b> 		
<b>5 GHz Wall Mounted</b> 		

Order Information	
Part Number	Description
DAP-2662	Nuclias Connect AC1200 Wave 2 Access Point

<sup>1</sup> Will be supported in future versions.

<sup>2</sup> Maximum wireless signal rate derived from IEEE standard 802.11 and 802.11ac specifications. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, lower actual data throughput rate. Environmental factors will adversely affect wireless signal range.

<sup>3</sup> Please note that operating frequency ranges vary depending on the regulations of individual countries and jurisdictions. The DAP-2695 may not support the 5.25 - 5.35 GHz and 5.47 - 5.725 GHz frequency ranges in certain regions.

<sup>4</sup> AP Array is no longer supported in the latest firmware. To use AP Array to manage the device, downgrade the device firmware to version v1.20.

<sup>5</sup> For the EU region, this product is compliant with CE regulations and operates within the following frequency ranges: 2.4 - 2.4835 GHz, 5.150 - 5.250 GHz, 5.250 - 5.350 GHz, and 5.470 - 5.750 GHz.

August 7, 2020 11:38 AM

Specifications are subject to change without notice. D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries. All other trademarks belong to their respective owners. ©2020 D-Link Corporation. All rights reserved. E&OE